


XTL Series Products

SMD Capability	5.0x3.2 (mm)	4.0x2.5 (mm)	3.2x2.5 (mm)	2.5x2.0 (mm)
Fundamental Frequency Range (3 rd)	8 MHz~54 MHz 75 MHz~106.65 MHz	11 MHz~50 MHz	12 MHz~54 MHz	16 MHz~54 MHz
Shunt Capacitance	5.0 pF Max	5.0 pF Max	5.0 pF Max	3.0 pF Max
Load Capacitance	5~37 pF	7~30 pF	6~30 pF	8~20 pF
Contact RFM for Custom Device / Specifications				



Packages and Dimensions

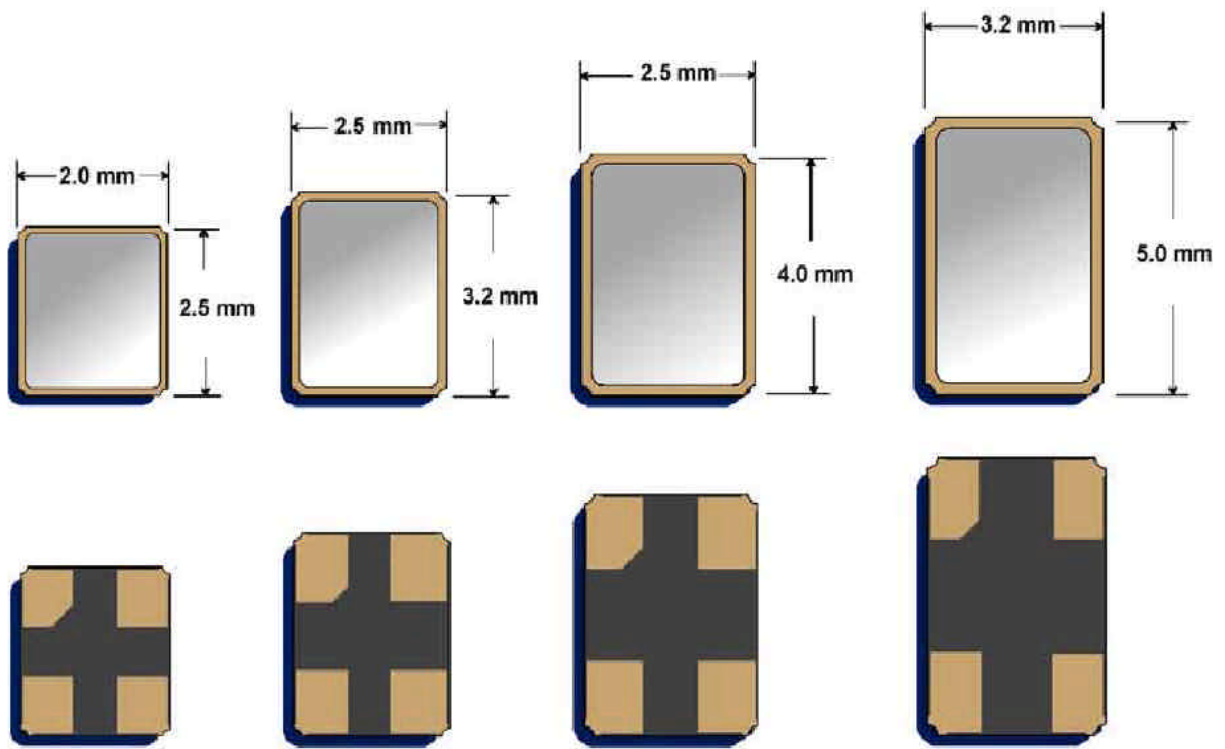